





PART 2: Setting up Wi-Fi 6 Router & Mesh

- 1** Switch on the Mesh (B) unit and wait for 60 seconds until the LED lights for Power, 2.4G, and 5G are ON and stable.
- 2** Press the WPS button at the back of your new Wi-Fi 6 Router (A) for 3 seconds. Release the button and wait for the WPS LED light to start flashing.
- 3** Then, press the WPS button at the back of the new Mesh (B) unit until the WPS LED light flashes rapidly (light will flash within 15 seconds). Wait for 2 minutes for both Wi-Fi 6 router and Mesh units to connect to each other.
- 4** The connection is successful when both Internet & WAN LED lights on the Mesh unit are ON and the WPS LED light on the new Wi-Fi 6 router and Mesh are OFF.

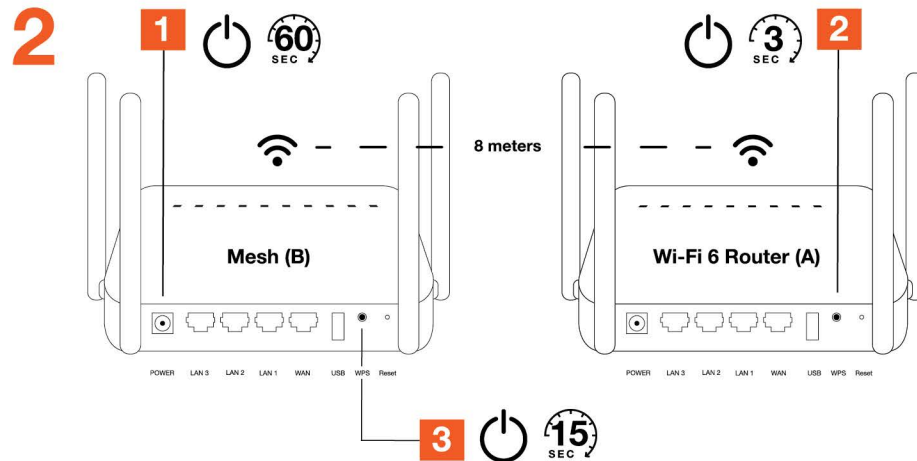


NOTE: The max range for placement between Wi-Fi 6 router and Mesh is 8 meters with clear sight (no wall/blockage in between)

For further assistance regarding the setup, please contact us at 1800-88-5059 (Working hours 8.30am - 5.30pm, Monday - Friday)

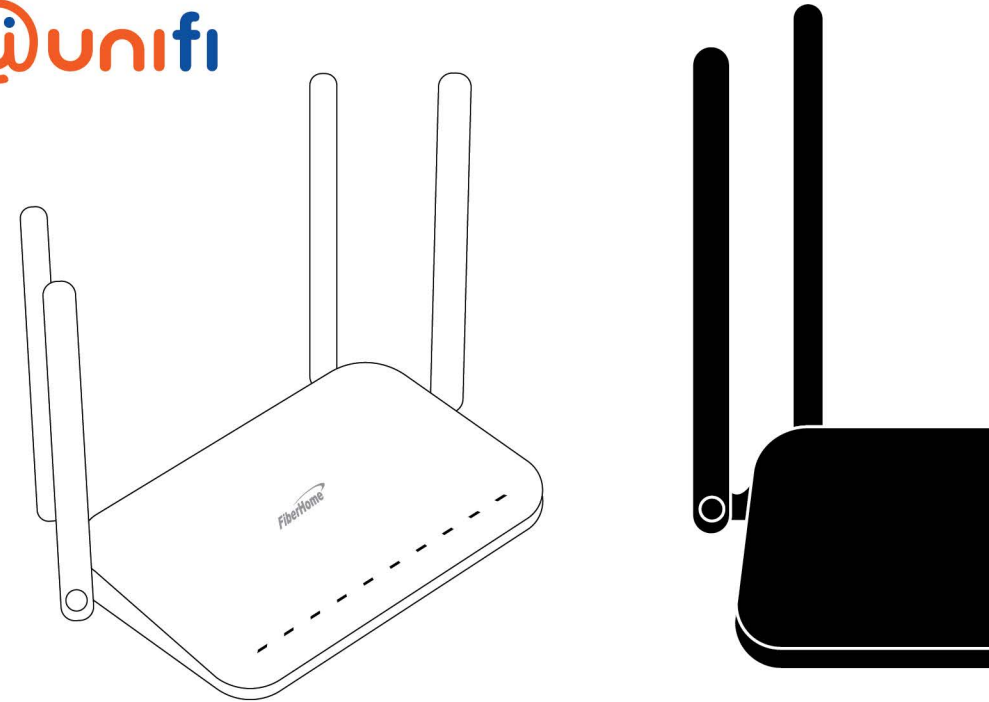


Wi-Fi 6 Router & Mesh


Items for installation:



Wi-Fi 6 Router (A)



Mesh (B)



Modem (BTU)



unifi TV Media Box


Optional:

IMPORTANT NOTE:


Once you have received your router package containing your new Wi-Fi 6 Router (A) with Mesh (B), you are advised to install the router within 7 days. During installation, please follow the label instructions for Wi-Fi 6 Router (A) and Mesh (B). Installation after 7 days from receiving the package will require assistance for setup. Please contact us at 1800-88-5059 to complete it.

1

1

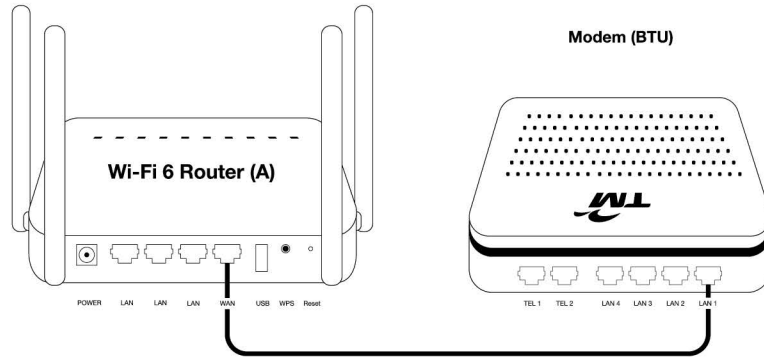

2

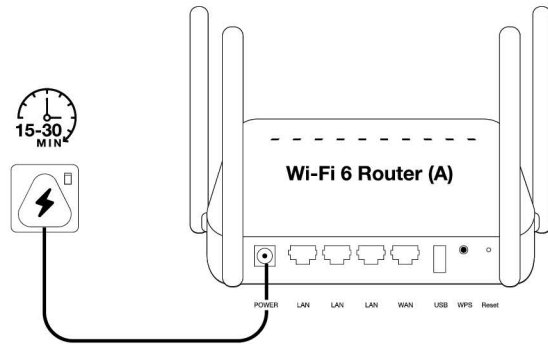

PART 1: Connect the new Wi-Fi 6 Router to the modem

- Before we start, unbox your new Wi-Fi 6 Router (A) and Mesh (B). Unplug your old router and its cables.
- Ensure that the items labelled Wi-Fi 6 Router (A) and Mesh (B) are identified correctly before installation. Incorrect installation may affect your connection.


1 Connect the cable from the WAN port of your new Wi-Fi 6 Router (A) to the LAN 1 port of your existing modem.

2 Connect the Wi-Fi 6 router's power adapter to your power supply socket and switch it on.

- Please wait between 15 to 30 minutes for our system to run the auto-configuration and establish the connection.

* Once you are connected, you will receive your new broadband password via SMS for your future reference. This password has been auto-configured in your new Wi-Fi 6 router.

* You will also get a new default Wi-Fi network name (SSID) and password which can be found at the bottom the new Wi-Fi 6 router.

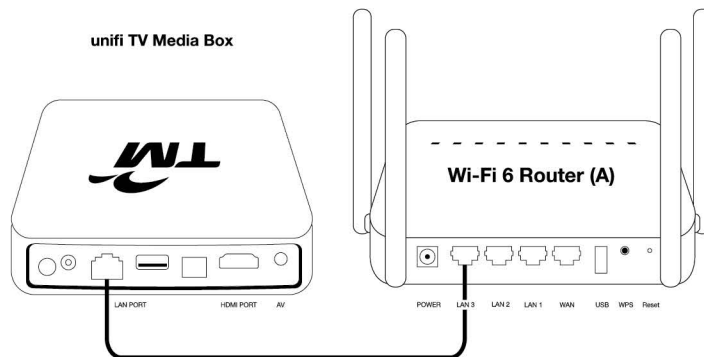

OPTIONAL: Connect unifi TV Media Box to the Wi-Fi 6 router

- If you have a unifi TV Media Box (white box or unifi Plus Hybrid Box), connect the Media Box cable from the LAN port to the new Wi-Fi 6 router LAN 3 port. For unifi Plus Box (uPB), you can just connect to the Wi-Fi network.