


## PART 2: SETTING UP WI-FI 6 ROUTER & MESH

- 1 Please make sure the Wi-Fi 6 Router (A) is switched ON. Then, plug in and switch on the Mesh (B) unit and wait for 60 seconds until all LED lights are ON and stable.
- 2 Connect the cable provided in the box from the LAN port (1 or 2) of your new Wi-Fi 6 Router (A) to the WAN port of your new Mesh (B).
- 3 Wait for the connection on Mesh (B) to be established and stable (within 5 mins). Once the connection is successful, the LED Mesh (B) unit light will be ON and stable.
- 4 Disconnect the cable from the LAN port (1 or 2) of your Wi-Fi 6 Router (A) to the WAN port of your Mesh (B).
- 5 Unplug the Mesh (B) and relocate the Mesh to the suitable location (open space). Switch on the Mesh (B) to stay connected.

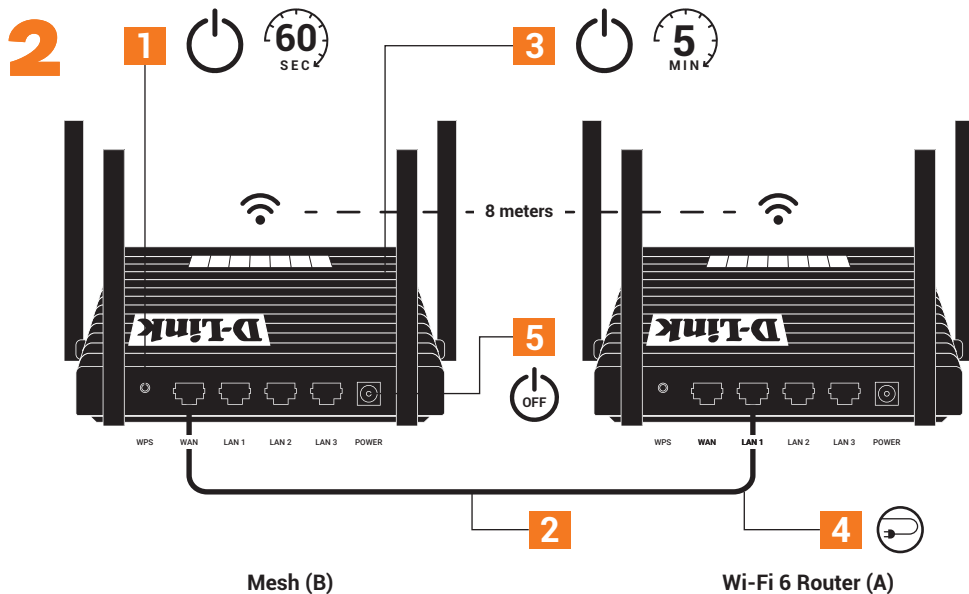


## WI-FI 6 ROUTER & MESH

### ITEMS FOR INSTALLATION:



Wi-Fi 6 Router (A)



Mesh (B)



Modem (BTU)



Unifi TV Media Box

### OPTIONAL:


### IMPORTANT NOTE:

Once you have received your router package containing your new Wi-Fi 6 Router (A) with Mesh (B), you are advised to install the router within 7 days. During installation, please follow the labelled instructions for Wi-Fi 6 Router (A) and Mesh (B).


Installation after 7 days from receiving the package will require assistance for setup. Please contact us at 1800-88-5059 to complete it.

# 1

## 1

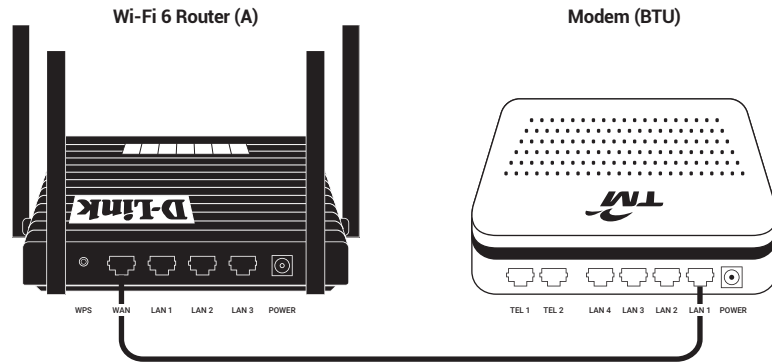

## 2

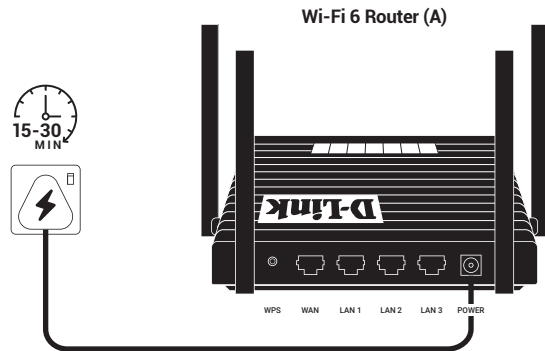


## PART 1: CONNECT THE NEW WI-FI 6 ROUTER TO THE MODEM

- Before we start, unbox your new Wi-Fi 6 Router (A) and Mesh (B).
- Ensure that the items labelled Wi-Fi 6 Router (A) and Mesh (B) are identified correctly before installation. Incorrect installation may affect your connection.
- Mark your old cable connection before disconnecting it from the old router port to avoid any incorrect connections on the new router port.


- 1** Connect the cable from the WAN port of your new Wi-Fi 6 Router (A) to the LAN 1 port of your existing modem.
- 2** Connect the Wi-Fi 6 Router (A)'s power adapter to your power supply socket and switch it on.

- Please wait between 15 to 30 minutes for our system to run the auto-configuration and establish the connection.
- Once you are connected, you will receive your new broadband password via SMS for your future reference. This password has been auto-configured in your new Wi-Fi 6 Router (A).
- You will also get a new default Wi-Fi network name (SSID) and password which can be found at the bottom of the new Wi-Fi 6 Router (A).

Unifi TV Media Box



Wi-Fi 6 Router (A)

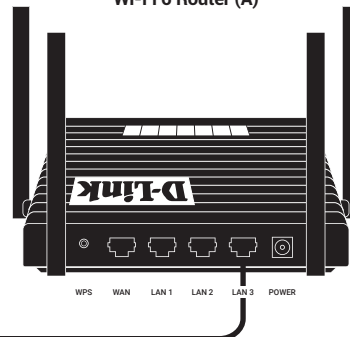


## OPTIONAL: CONNECT UNIFI TV MEDIA BOX TO THE WI-FI 6 ROUTER

- If you have a Unifi TV Media Box (white box or Unifi Plus Hybrid Box), connect the Media Box cable from LAN port to the new Wi-Fi 6 Router (A) LAN 3 port. For Unifi Plus Box (UPB), you can just connect to the Wi-Fi network.



## BAHAGIAN 2: MELARASKAN ROUTER WI-FI 6 & MESH

- 1 Sila pastikan Router Wi-Fi 6 (A) telah dihidupkan, pasang plug unit Mesh (B) dan tunggu selama 60 saat sehingga semua lampu LED MENYALA dan stabil.
- 2 Sambungkan kabel yang disediakan di dalam kotak daripada port LAN (1 atau 2) Router Wi-Fi 6 (A) baharu kepada port WAN Mesh (B) baharu anda.
- 3 Tunggu sehingga sambungan pada Mesh (B) berjaya dan stabil (dalam masa 5 minit). Setelah sambungan berjaya, lampu LED unit Mesh (B) akan menyala dan stabil.
- 4 Tanggalkan kabel daripada port LAN (1 atau 2) Router Wi-Fi 6 (A) kepada port WAN Mesh (B) anda.
- 5 Cabut plug Mesh (B) dan tempatkan semula di kawasan yang sesuai (ruang terbuka). Hidupkan semula Mesh (B) untuk kekal di dalam talian.

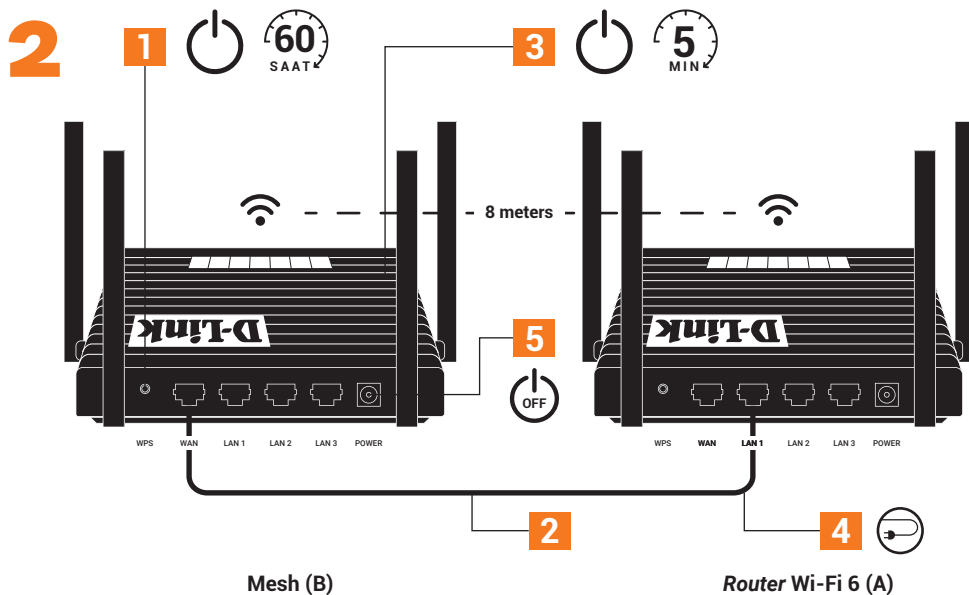

Untuk bantuan lanjut mengenai pemasangan, sila hubungi kami di **1800-88-5059** (waktu pejabat 8.30 pagi - 5.30 petang, Isnin - Jumaat)




## ROUTER WI-FI 6 & MESH

### KOMPONEN UNTUK PEMASANGAN:



Router Wi-Fi 6 (A)



Mesh (B)



Modem (BTU)



Kotak Media Unifi TV

### TAMBAHAN:


### NOTA PENTING:

Setelah menerima bungkusan pakej Router Wi-Fi 6 (A) baharu anda dengan Mesh (B), pemasangan penghala tersebut harus dilakukan dalam 7 hari. Sila ikut arahan yang disediakan semasa proses pemasangan Router Wi-Fi 6 (A) dan Mesh (B).


Pemasangan selepas hari ke-7 perlu mendapatkan bantuan pemasangan. Hubungi kami di **1800-88-5059** untuk pemasangan lengkap.

# 1

## 1

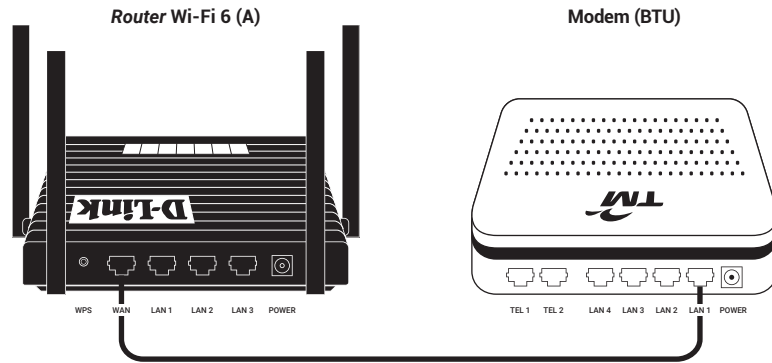

## 2

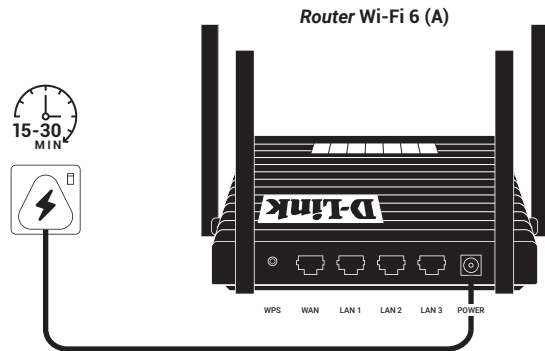

## BAHAGIAN 1: SAMBUNGAN ROUTER WI-FI 6 BAHARU KE MODEM


- Sebelum kita mulakan, buka bungkus Router Wi-Fi 6 (A) baharu dengan Mesh (B).
- Sila pastikan komponen bertanda Router Wi-Fi 6 (A) dan Mesh (B) dikenal pasti dengan betul sebelum memulakan proses pemasangan. Pemasangan yang salah akan menjejaskan sambungan anda.
- Tandakan kabel lama anda sebelum ditanggalkan daripada port router lama untuk mengelakkan sebarang kesalahan sambungan kepada port router baharu.

**1** Sambungkan kabel daripada port WAN Router Wi-Fi 6 (A) baharu kepada port LAN 1 modem sedia ada.


**2** Sambungkan penyesuai kuasa Router Wi-Fi 6 (A) ke soket bekalan kuasa dan hidupkan.

- Sila tunggu 15 - 30 minit untuk sistem konfigurasi automatik dijalankan dan sambungan talian diwujudkan.
- Selepas talian disambung, anda akan menerima kata laluan jalur lebar baharu melalui SMS sebagai rujukan untuk masa hadapan. Kata laluan tersebut telah disediakan secara automatik dalam Router Wi-Fi 6 (A) baharu anda.
- Anda juga akan mendapat SSID dan kata laluan baharu yang boleh dirujuk di bahagian bawah Router Wi-Fi 6 (A).

Kotak Media Unifi TV



Router Wi-Fi 6 (A)

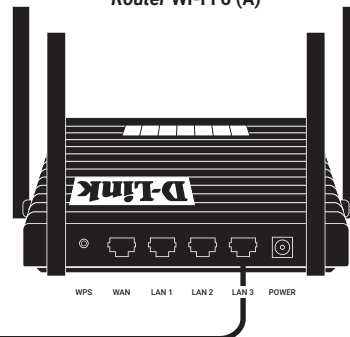

## TAMBAHAN: SAMBUNGAN KOTAK MEDIA UNIFI TV KE ROUTER WI-FI 6

- Jika anda mempunyai kotak Media Unifi TV (kotak putih atau Unifi Plus Hybrid Box), sambungkan kabel kotak Media daripada LAN ke port LAN 3 Router Wi-Fi 6 (A) baharu. Untuk Unifi Plus Box (UPB) anda hanya perlu sambungkan kepada sambungan Wi-Fi.

